


# TrueSense

## Pet Immuned PIR Motion Detector


MODEL No: PR-723P

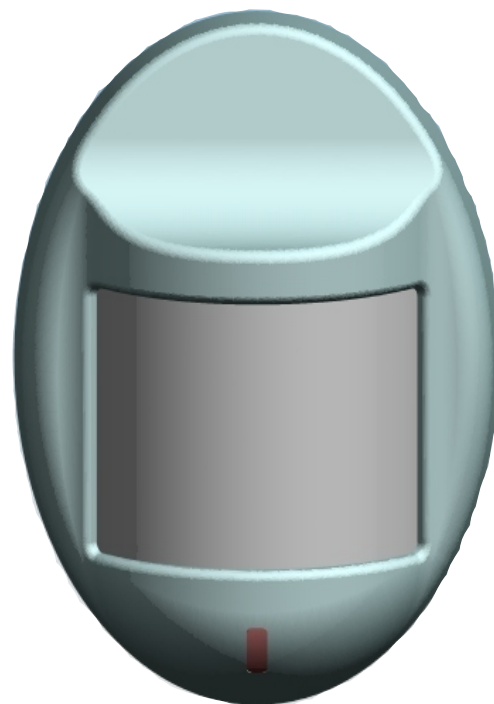

### Features

- Microcontroller based design
- Digital Noise reduction algorithm
- Digital Signal Processing to avoid false triggering
- Power On delay Enable/Disable to avoid self alarm on security panel arming
- Superior EMI and RFI Protection
- Sealed Optics
- Relay Output NO / NC selectable
- Walk test LED Enable/Disable selectable
- Automatic temperature compensation
- Programmable sensitivity
- Wall / Ceiling mount

### Detection Pattern

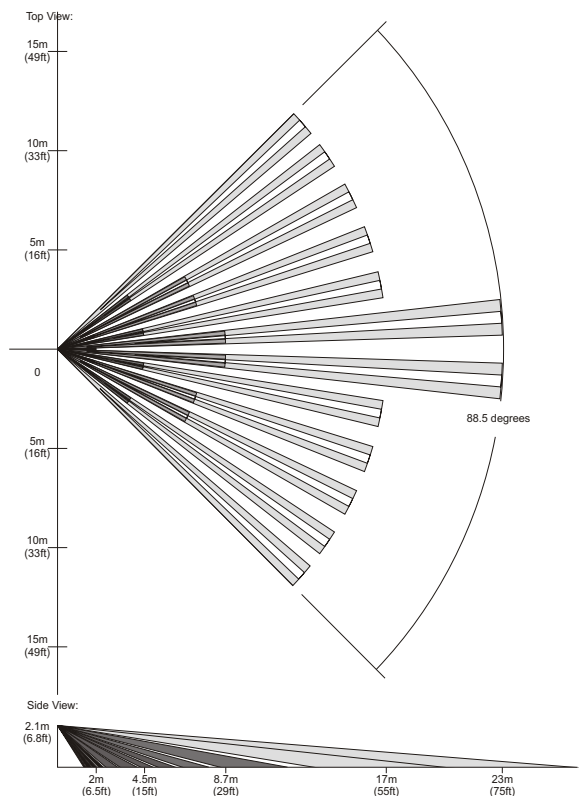

### Specifications:

PIR Sensor: Dual Element  
Power Supply: 9 ~ 16 VDC.  
12 VDC, 18mA  
Alarm Output: NO/NC 100VDC, 0.5A  
Alarm Period: Fixed 2 seconds  
Tamper Switch: NC. Cover open, Activates  
Detectable Speed: 0.3 ~ 3.0 m/Sec  
Mounting Height: 1.8 ~ 3.6m. 2.1m Typical  
Detection Range: 88.5° x 23m  
Walk Test LED: 3mm Red LED.  
Jumper selectable to enable/disable

Working Temperature:  
EMI/RFI Immunity:  
Humidity:



**Realty Automation & Security Systems Pvt. Ltd.**  
5, New Sadashiv Peth, Near Alka Talkies, Pune-411030  
Tel: +91-20-3292 2630 / 3292 1306  
E-mail-sales@vignaharta.in, Website: www.vignaharta.in